



PRICE LIST

JULY 2024



1300 554 307

sales@waterboypumps.com.au accounts@waterboypumps.com.au www.waterboypumps.com.au



Pricing valid from 1st July 2024 All pricing RRP excluding dealer discount Subject to change without notice

LIFT M

QUICK PUMP SELECT

4CSS7-31 3000w pg 24

4CSS7-31 3000w pg 24

4CSS12-18 3000w pg 25

4HRH2200 pg 12

4HRH1100 pg 11

110

4CSS7-31 3000w

1CSS7-31 3000w pg 24

4CSS7-31 3000w pg 24

4HRH2200 pg 12

130

4CSS7-31 3000w pg 24

4CSS7-31 3000w pg 24

4HRH2200 pg 12

140

4CSS7-31 3000w pg 24

4CSS7-31 3000w pg 24

4CSS12-18 3000w

4HRH1100 pg 11

120

pg 25

pg 24

4HRH800 4HRH1100 4CSS12-18 and	100	4HRH1100 pg 11	4HRH1100	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25	4CS 30 89	4CSS7-31 3000w pg 24	S7-31 000w	S7-31 000w	S7-31 00w	S7-31 000w	S7-31 000w 124	S7-31 00w 124
4HRH1100 4CSS12-18 (ACSS12-18 (ACSS12	06	4HRH800	4HRH1100		4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25							
4HRH800 4HRH2200 3000w 99 10 99 12 9000w 99 10 99 11 99 11 99 25 99 25 99 25 99 25 99 25 99 25 99 11 99 11 99 11 99 11 99 12 99 12 99 11 99 11 99 12 99 12 99 11 99 11 99 12 99 12 99 11 99 11 99 12 99 12 99 11 99 11 99 12 99 11 99 12 99 11 99 11 99 12 99 11 99 12 99 11 99 11 99 12 99 11 99 11 99 12 99 11 99 11 99 12 99 11 99 11 99 12 99 11 99 11 99 12 99 11 99 11 99 11 99 12 99 11 99 11 99 11 99 11 99 12 99 11 9	80	4HRH800	4HRH1100		4CSS12-18 3000w pg 25		4CSS12-18 3000w pg 25		4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25
4HRH800 4HRH1100 4CSS12-18 3000w 9000w 9000w 9000w 4CSS12-18 3000w 9000w 4C12-6 2200w 900 11000w 900 1100w 4C12-6 2200w 900 1100w 4C12-6 2200w 900 1100w 900 1100w 4C7-8 900 1100w 900 1100w 900 1100w 900 1100w 4C7-8 900 1100w 900 1100w 900 1100w 10,000 15,000 20,000 25,000	20	4HRH800	4HRH800	4HRH2200	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25		4CSS12-18 3000w pg 25	4CSS12-18 4CSS12-18 3000w 3000w pg 25 pg 25			
4HRH800 4HRH1100 4CSS12-18 3000w 3000w 93 25 4CSS12-18 925 4CSS12-18 925 4CSS12-18 925 4CSS12-18 3000w 3000w 93 25 4HRH800 4HRH1100 4HRH2200 4C12-6 4C7-8 2200w 93 2 4C7-8 2200w 93 2 4C12-6 4C12-6 2200w 93 2 4C12-6 4C12-6 2200w 93 2 3HRH400 4HRH1100 4HRH2200 2200w 93 21 4C7-8 4C7-8 4C7-8 1100w 93 11 4C7-8 4C7-8 1100w 93 11 4C7-8 1100w 93 11 3HRH400 4HRH1100 4HRH2200 4C7-8 1100w 93 16 4C7-8 93 16 4C7-8 93 16 4C7-8 93 16 99 8 99 11 99 12 99 16 99 16 99 16 99 16 10,000 15,000 20,000 25,000 30,000	09	3HRH400 pg 8	4HRH800 pg 10	4HRH1100	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25		4CSS12-18 3000w pg 25	40		4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25
4HRH800 4HRH1100 4HRH2200 4C12-6 4C7-8 Pg 10 Pg 11 4HRH2200 4C12-6 4C72-6 4HRH800 4HRH1100 4HRH2200 4C12-6 4C12-6 3HRH400 4HRH1100 4HRH2200 4C7-8 4C7-8 3HRH400 4HRH1100 4HRH2200 4C7-8 4C7-8 3HRH400 4HRH1100 4HRH2200 1100w 1100w Pg 8 Pg 11 Pg 12 Pg 16 Pg 16 10,000 15,000 20,000 25,000 30,000	20	3HRH400 pg 8	4HRH800 pg 10	4HRH1100	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25	4CSS12-18 3000w pg 25	4	4CSS12-18 3000w pg 25		4CSS12-18 4C 3000w pg 25	4CSS12-18 3000w pg 25	4CSS12-18 4CSS12-18 3000w 3000w pg 25 pg 25
4HRH800 4HRH1100 4HRH2200 4C12-6 4C12-6 Pg 10 Pg 12 Pg 12 Pg 21 Pg 21 3HRH400 4HRH1100 4HRH2200 4C7-8 4C7-8 1100w 3HRH400 4HRH1100 4HRH2200 4C7-8 4C7-8 1100w 3HRH400 4HRH1100 4HRH2200 4C7-8 4C7-8 4C7-8 1100w Pg 16 Pg 16 Pg 16 Pg 16 Pg 16 10,000 15,000 20,000 25,000 30,000		3HRH400 pg 8	4HRH800 pg 10	4HRH1100	4HRH2200 pg 12	4C12-6 2200w pg 21	4C7-8 2200w pg 6	94	4CSS12-18 3000w pg 25	40	4CSS12-18 4C 3000w pg 25	4CSS12-18 4CSS12-18 4C 3000w 3000w 3000w 3	4CSS12-18 4CSS12-18 3000w 3000w pg 25 pg 25
3HRH400 4HRH1100 4HRH2200 4C7-8 1100w pg 12 1100w pg 16 1100w pg 16 pg 17 pg 16 pg 1		3HR300	4HRH800	4HRH1100	4HRH2200	4C12-6 2200w pg 21	4C12-6 2200w pg 21	4.4	4C12-6 2200w pg 21	4.,	4C12-6 4C 2200w Pg 21	4C12-6 4CSS12-18 4C 2Z00w 3000w 3	4C12-6 4CSS12-18 4CSS12-18 4C 2Z00w 3000w
3HRH400 4HRH1100 4HRH2200 4C7-8 1100w 1100w pg 12 1100w pg 16 pg 1		3HR300 pg 7	3HRH400	4HRH1100	4HRH2200 pg 12	4C7-8 1100w pg 16	4C7-8 1100w pg 16		4C12-6 2200w pg 21	7 (1	4C7-8 2200w pg 16	4C7-8 4C12-6 2200w 2200w pg 16 pg 21	4C7-8 4C12-6 2200w 2200w pg 16 pg 21
10,000 15,000 20,000 25,000 30,000	_	3HR200	3HRH400		4HRH2200 pg 12	4C7-8 1100w pg 16	4C7-8 1100w pg 16		4C12-6 2200w pg 21		4C7-8 2200w pg 16	4C7-8 4C7-8 4 2200w 2200w 2	4C7-8 4C7-8 4C12-6 2200w 2200w 2200w pg 16 pg 16 pg 21
		2,000	10,000	15,000	20,000	25,000	30,000	ന	35,000	5,000 40,000		40,000	40,000 45,000

Average litres per day based on 6 pumping hours. Approximately 20% more water in summer, 20% less in winter.



ABOUT WATERBOY PUMPS

We're a family of farmers, drillers and pump technicians who recognised 20 years ago there needed to be a better way to pump water in rural and remote areas. So we got stuck in the only way we knew how - using our experience on the land to source and manufacture solutions that make sense out here. Today our pumps are in almost every corner of Australia and trusted by the biggest names in business.

As Australia is pushing more and more towards the protection of our environment, Waterboy is helping decarbonise our earth one pump at a time as we head towards a zero emissions future.

KEY SELLING POINTS

- Environmentally friendly, helping decarbonise Australia.
- Perfect energy transition product to assist clients reduce CO² output.
- · Family owned business.
- A very good sized solar system for windmill and motorised pump replacements.
- · They are very reliable.
- · Pricing fits in below the major brands.
- · Helical rotor replacements are cheaper and easy to repair.
- · Systems are plug & play and very easy to install.
- · You can keep a couple in stock and slot into jobs as required.
- · You don't need an app to operate.
- Systems come with 3 years warranty.



WATERBOY

PRICING

All pricing is RRP and does not include wholesale discount or GST.

SYSTEM PACKING & SHIPPING

Complete kits include all the hardware for the pump system. You only need to supply a few fittings, poly pipe and concrete to complete installation.

Shipping rates as follows:

- XFREX1 200w, 300w and 400w systems \$300+GST
- XFREX2 800w and 1100w systems \$500+GST
- XFREX3 Bigger systems are quoted per application

Drive packs, is the pump, motor & controller only, does NOT include solar panels, framing or any accessories:

- · XFREX4 Single drive pack \$100+GST
- XFREX5 10 x Drive packs \$500+GST
 NO DISCOUNT APPLIES TO FREIGHT



Drive Pack

PUMP SIZING

For product longevity, BW Solar strongly recommend upsizing the pumping system if operating close to the limit of the pump systems lift or flow rate capability. Operating above the pumps capabilities will reduce life and increase chance of failure due to stress on the entire system.

WARRANTY

Waterboy pumps have averaged less than 1.5% warranty return rates over the last 5 years, as of 1st July 2023 warranty is increasing to 3 years on complete systems. All drive packs have a 2 year warranty.








RETURN POLICY

Please contact us prior to any return of goods to obtain authorisation.

Goods ordered and shipped but then returned (other than faulty goods) must be received back within 21 days of original shipment, in unused/ undamaged condition, in original packaging Customer to pay return freight costs and 20% restocking fee. Pump parts ordered (rotor/stator or impellers) are non-returnable.

HELICAL ROTOR PUMP SYSTEMS

The most efficient, robust and cost effective pump



Bore Kit with 35m cable/ Dam Kit with 35m cable System Wattage Helical Rotor / High Head Pump Diameter

3HR200-B35 / 3HR200-D35

3" Diameter

HR - Helical Rotor pump end

200 - 200w of solar power

B35 - Bore kit with 35m power, low water and SS safety cabling

D35 - Dam kit with 35m power cable and SS safety cable

Add extra cable to any pump system:

6000B bore pump extra cabling (power, low water & ss safety cable) \$16/m+GST 6000D dam pump system extra (Power and SS safety cable) \$12/m+GST

PERFORMANCE CHARTS

	3HR200					
-	TDH	L/MIN	L/DAY			
	5	17	6120			
	10	16	5760			
	15	14	5040			
	20	12	4320			
	25	10	3600			
	30	8	2880			
				A		

TDH - Total Dynamic Head is the calculation of vertical meters lift plus any friction loss in the delivery pipe. A bigger pipe size will help reduce friction and increase the pumps longevity.

L/DAY - Performance based on 6 peak sun hours of pumping. Summer months you can expect 20% more water per day and winter months 20% less.



Helical Rotor (HR) solar pump systems include

- Drive Pack pump, motor, controller
- Heavy duty cyclone rated pole mount frame
- Mono crystalline solar panels
- Bore or Dam mounting accessory kit
- 35m or 40m Cabling set (power, low water & SS safety)

	3HR	200	3HR	300	3HR	H400
TDH	L/MIN	L/DAY	L/MIN	L/DAY	L/MIN	L/DAY
5	17	6,120	26	9,360	32	11,520
10	16	5,760	25	9,000	31	11,160
15	14	5,040	24	8,640	30	10,800
20	12	4,320	22	7,920	29	10,440
25	10	3,600	20	7,200	28	10,080
30	8	2,880	18	6,480	27	9,720
40			13	4,680	23	8,280
50			8	2,880	20	7,200
60					15	5,400
70					12	4,320
RRP	\$4.	527	\$5.	022	\$5.	503



TDH	L/MIN	L/DAY	L/MIN	L/DAY	L/MIN	L/DAY	L/MIN	L/DAY
10	47	16,920	38	13,680	51	18,360	61	21,960
20	37	13,320	37	13,320	50	18,000	61	21,960
30	27	9,720	36	12,960	47	16,920	61	21,960
40	18	6,480	34	12,240	46	16,560	60	21,600
50			33	11,880	44	15,840	55	19,800
60			30	10,800	42	15,120	50	18,000
70			28	10,080	39	14,040	45	16,200
80			26	9,360	36	12,960	40	14,400
90			15	5,400	33	11,880	38	13,680
100					28	10,080	34	12,240
110					25	9,000	30	10,800
120					20	7,200	27	9,720
130							23	8,280
140							19	6,840
RRP	\$6,	518	\$7,	41 0	\$7,	942	\$9,	060








35m/40m Power Cable low water probe & safety cabling



- Dry run protection
- Bore cap or Dam float
- Spare helical rotor
- Easy DIY installation manual



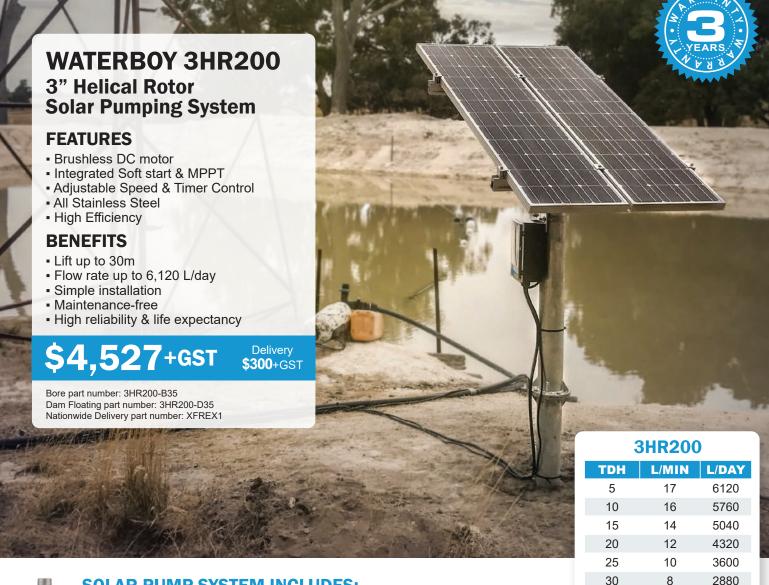





3HRSS Pump, Motor, and Controller



35m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole **Mount Frame**



2x105w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions 1x Crate 175 x 55 x 65cm @ 125kg



WATERBOY 3HR300 3" Helical Rotor Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency


BENEFITS

- Lift up to 50m
- Flow rate up to 9,360 L/day
- Simple installation
- Maintenance-free
- · High reliability & life expectancy

\$5,022+GST

Delivery \$300+GST

Bore part number: 3HR300-B35 Dam Floating part number: 3HR300-D35 Nationwide Delivery part number: XFREX1

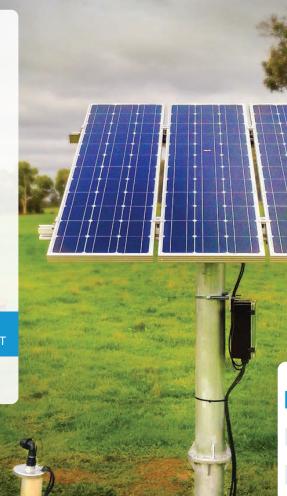

3HR300

TDH	L/MIN	L/DAY
5	26	9,360
10	25	9,000
15	24	8,640
20	22	7,920
25	20	7,200
30	18	6,480
40	13	4,680
50	8	2,880

SOLAR PUMP SYSTEM INCLUDES:



3HRSS Pump, Motor, and Controller



35m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



3x105w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST




Anode \$120+GST



Shipping Dimensions
1x Crate 175 x 55 x 65cm @ 135kg



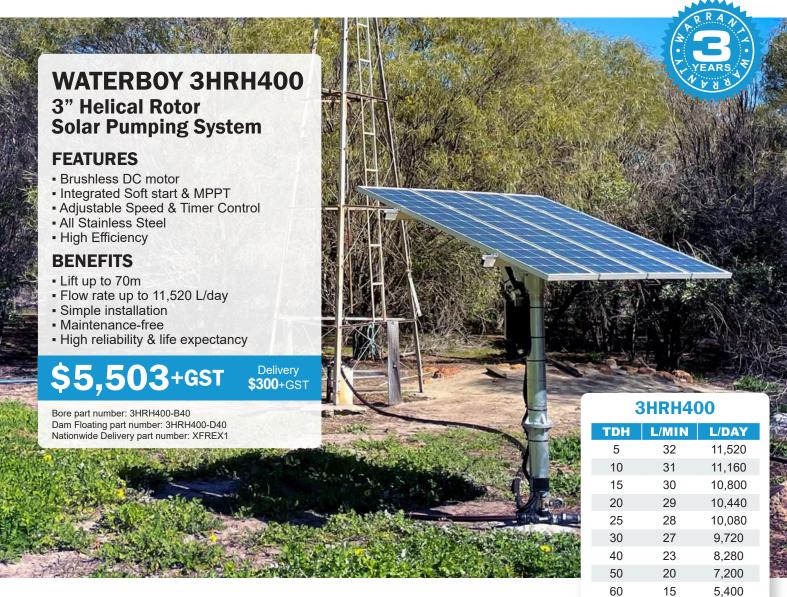

SOLAR PUMP SYSTEM INCLUDES:



3HRSS-H Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



4x105w Mono Crystalline Solar Panels



70

12

Bore Cap or Dam Float



4,320

Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions
1x Crate 175 x 55 x 65cm @ 150kg



WATERBOY 4HR400 4" Helical Rotor Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 40m
- Flow rate up to 16,920 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

\$6,518+GST

Delivery \$300+GST

Bore part number: 4HR400-B40 Dam Floating part number: 4HR400-D40 Nationwide Delivery part number: XFREX1



4HR400

TDH	L/MIN	L/DAY
10	47	16,920
20	37	13,320
30	27	9,720
40	18	6,480

SOLAR PUMP SYSTEM INCLUDES:



4HRSS Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



4x105w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions 1x Crate 175 x 55 x 65cm @ 165kg



WATERBOY 4HRH800 4" Helical Rotor **Solar Pumping System**

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 90m
- Flow rate up to 13,680 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

Delivery \$500+GST

Bore part number: 4HRH800-B40 Dam Floating part number: 4HRH800-D40 Nationwide Delivery part number: XFREX2



4HRH800

TDH	L/MIN	L/DAY
10	38	13,680
20	37	13,320
30	36	12,960
40	34	12,240
50	33	11,880
60	30	10,800
70	28	10,080
80	26	9,360
90	15	5,400

SOLAR PUMP SYSTEM INCLUDES:



4HRSS-H Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



3x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST





Shipping Dimensions \$120+GST 1x Crate 210 x 100 x 55cm @ 195kg











40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



4x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST





Shipping Dimensions \$120+GST 1x Crate 210 x 100 x 60cm @ 215kg



WATERBOY 4HRH2200 4" Helical Rotor Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 140m
- Flow rate up to 21,600 L/day
- Simple installation
- Maintenance-free
- · High reliability & life expectancy

\$9,060+gst

Contact us for delivery rates

Bore part number: 4HRH2200-B40 Dam Floating part number: 4HRH2200-D40



SOLAR PUMP SYSTEM INCLUDES:



4HRSS-H Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



8x370w Mono Crystalline Solar Panels



60

70

80

90

100

110

120

130

140

50

45

40

38

34

30

27

23

18,000

16,200

14,400

13,680

12,240

10,800

9.720

8,280

6,840

Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST




Anode \$120+GST



Shipping Dimensions 1x Crate 290 x 55 x 65cm @ 230kg 1x Pallet 170 x 115 x 43cm @ 170kg

CENTRIFUGAL PUMP SYSTEMS

High flow medium lift applications

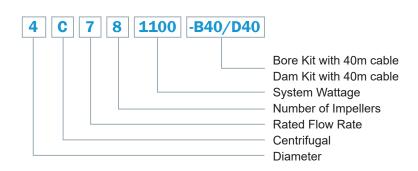

4C781100-B40 / 4C781100-D40

- 4" Diameter
- C Centrifugal pump end
- 7 Rated flow rate m3/hr
- 8 Number of impellers

1100 - 1100w of solar power supplied with system

B40 - Bore kit with 40m power, low water and SS safety cabling

D40 - Dam kit with 40m power cable and SS safety cable

PERFORMANCE CHARTS


	4C781100					
-	TDH	L/MIN	L/DAY			
	5	100	36,000			
	10	95	34,200			
	15	90	32,400			
	20	85	30,600			
	25	70	25,200			
	30	60	21,600			
	40	40	14,400			

TDH - Total Dynamic Head

is the calculation of vertical meters lift plus any friction loss in the delivery pipe. A bigger pipe size will help reduce friction and increase the pumps longevity.

L/DAY - Performance based on 6 peak sun hours of pumping. Summer months you can expect 20% more water per day and winter months 20% less.



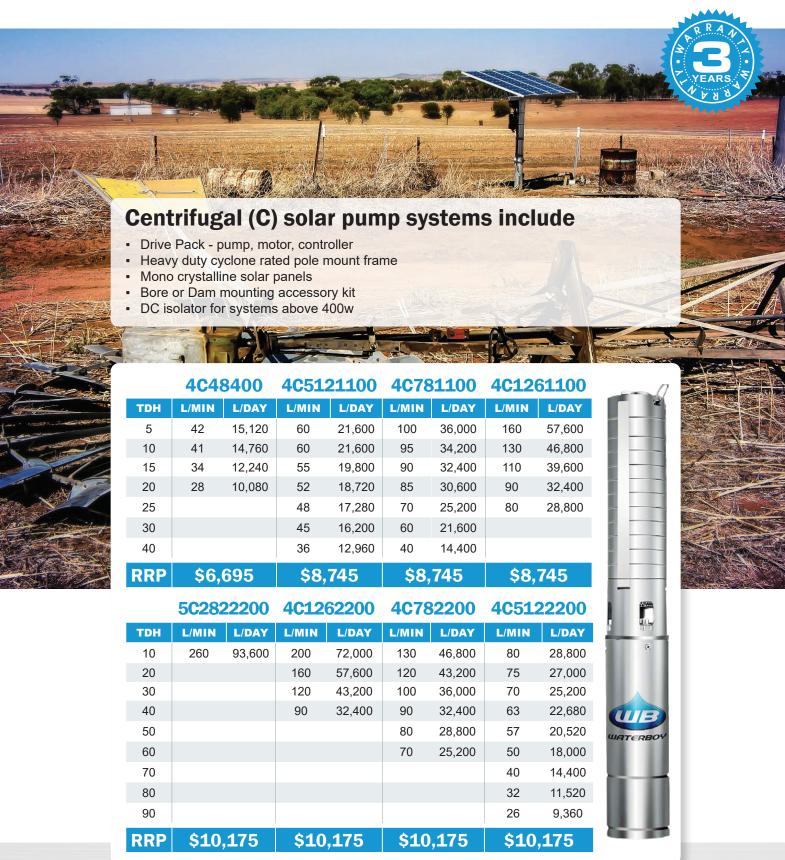





40m Power Cable low water probe & safety cabling



- Dry run protection
- Bore cap or Dam float
- Easy DIY installation manual





FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 20m
- Flow rate up to 15,120 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

\$6,695+GST

Delivery \$300+GST

Bore part number: 4C48400-B40
Dam Floating part number: 4C48400-D40
Nationwide Delivery part number: XFREX1



SOLAR PUMP SYSTEM INCLUDES:



4CSS Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



4x105w Mono Crystalline Solar Panels



Bore Cap or Dam Float



L/DAY

15,120

14,760

12,240

10.080

4C48400

42

41

34

28

TDH L/MIN

5 10

15 20

Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions
1x Crate 175 x 55 x 65cm @ 165kg









4CSS Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



4x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST





Shipping Dimensions \$120+GST 1x Crate 210 x 100 x 60cm @ 230kg



WATERBOY 4C5121100 4" Centrifugal **Solar Pumping System**

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 40m
- Flow rate up to 21,600 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

Delivery \$500+GST

Bore part number: 4C5121100-B40 Dam Floating part number: 4C5121100-D40 Nationwide Delivery part number: XFREX2



SOLAR PUMP SYSTEM INCLUDES:



4CSS Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



4x370w Mono Crystalline Solar Panels



5

10

15

20

25

30

40

60

60

55

52

48

45

36

Bore Cap or Dam Float



21,600

21,600

19,800

18,720

17,280

16,200

12,960

Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST






Shipping Dimensions \$120+GST 1x Crate 210 x 100 x 60cm @ 230kg









low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



4x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST





Shipping Dimensions \$120+GST 1x Crate 210 x 100 x 60cm @ 230kg



WATERBOY 4C782200 4" Centrifugal Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 60m
- Flow rate up to 46,800 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

\$10,175+gst

Contact us for delivery rates

Bore part number: 4C782200-B40 Dam Floating part number: 4C782200-D40



SOLAR PUMP SYSTEM INCLUDES:



4CSS Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



8x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



L/DAY

46,800

43,200

36,000

32,400

28,800

25,200

L/MIN

130

120

100

90

80

70

TDH

10 20

30

40

50

60

Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions 1x Crate 440 x 60 x 65cm @ 280kg 1x Pallet 200 x 115 x 45cm @ 190kg



WATERBOY 4C5122200 4" Centrifugal **Solar Pumping System**

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 90m
- Flow rate up to 28,800 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy



rates

Bore part number: 4C5122200-B40 Dam Floating part number: 4C5122200-D40







TDH	L/MIN	L/DAY
10	80	28,800
20	75	27,000
30	70	25,200
40	63	22,680
50	57	20,520
60	50	18,000
70	40	14,400
80	32	11,520
90	26	9,360

SOLAR PUMP SYSTEM INCLUDES:



4CSS Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



8x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions 1x Crate 440 x 60 x 65cm @ 280kg 1x Pallet 200 x 115 x 45cm @ 190kg





FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 40m
- Flow rate up to 72,000 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

\$10,175+gst

Contact us for delivery rates

Bore part number: 4C1262200-B40 Dam Floating part number: 4C1262200-D40







TDH	L/MIN	L/DAY
10	200	72,000
20	160	57,600
30	120	43,200
40	90	32,400

SOLAR PUMP SYSTEM INCLUDES:



4CSS Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



8x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions
1x Crate 440 x 60 x 65cm @ 280kg
1x Pallet 200 x 115 x 45cm @ 190kg



WATERBOY 5C2822200 5" Centrifugal Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 10m
- Flow rate up to 93,600 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

\$10,175+gst

Contact us for delivery rates

Bore part number: 5C2822200-B40 Dam Floating part number: 5C2822200-D40



SOLAR PUMP SYSTEM INCLUDES:



5CSS Pump, Motor, and Controller



40m of Power Cable low water probe & safety cabling



Heavy Duty Cyclone Rated Pole Mount Frame



8x370w Mono Crystalline Solar Panels



TDH

10

Bore Cap or Dam Float



L/DAY

93.600

5C2822200

L/MIN

260

Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST




Anode \$120+GST



Shipping Dimensions 1x Crate 440 x 60 x 65cm @ 280kg 1x Pallet 200 x 115 x 45cm @ 190kg

AC/DC SYSTEMS



Number of Impellers Rated Flow Rate kW Motor Power Rating AC or DC Power Supply Centrifugal 4" Diameter



WATERBOY 4C 2.2kW 7-18 ACDC

4" Centrifugal Solar Pumping System

FEATURES

- Permanent magnet Brushless double shield motor with FOC function.
- Soft start operation function extends the life of the system.
- AC/DC wide voltage: 60-380VDC or 90-240VAC,50/60Hz.
- MPPT function for DC part, can achieve > 99% efficiency.
- PFC (Power Factor Correction) function for AC can increase power factor over 0.99.
- Protection for over/under-load, over-temperature, over-Current, over-Voltage, Phase lack.
- Locked rotor protection.

BENEFITS

- Lift up to 120m
- Flow rate up to 5,400 L/hour
- Designed for remote & harsh Australian conditions.
- Fast & simple installation.
- Maintenance-free
- High reliability & life expectancy

\$11,590+GST

Contact us for delivery rates

Bore part number: 4CBW7-18-3000B Dam Floating part number: 4CBW7-18-3000D Bore pump extra cabling: 6000B Dam pump extra cabling: 6000D





TDH	L/MIN	L/HOUR
40	90	5,400
60	75	4,500
80	65	3,900
100	55	3,300
120	40	2,400

L/hour * 6 for solar average flow rate

SOLAR PUMP SYSTEM INCLUDES:



4C 7-18 2.2kW Pump, motor and switch



Power, Low Water and SS Safety Cable Bore \$18p/m / Dam \$14p/m



Heavy Duty Cyclone Rated Pole Mount Frame



8x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions 1x Crate 440 x 60 x 65cm @ 280kg 1x Pallet 200 x 115 x 45cm @ 190kg



WATERBOY 4C 2.2kW 14-12 ACDC

4" Centrifugal Solar Pumping System

FEATURES

- Permanent magnet Brushless double shield motor with FOC function.
- Soft start operation function extends the life of the system.
- AC/DC wide voltage: 60-380VDC or 90-240VAC,50/60Hz.
- MPPT function for DC part, can achieve > 99% efficiency.
- PFC (Power Factor Correction) function for AC can increase power factor over 0.99.
- Protection for over/under-load,over-temperature, over-Current, over-Voltage, Phase lack.
- Locked rotor protection.

BENEFITS

- Lift up to 80m
- Flow rate up to 12,000 L/hour
- Designed for remote & harsh Australian conditions.
- Fast & simple installation.
- Maintenance-free
- High reliability & life expectancy

\$11.590+gst

for delivery rates

Bore part number: 4CBW14-12-3000B Dam Floating part number: 4CBW14-12-3000D Bore pump extra cabling: 6000B Dam pump extra cabling: 6000D





4C 2.2kW 14-12

TDH	L/MIN	L/HOUR
20	200	12,000
30	180	11,000
40	150	9,000
50	130	8,000
60	100	6,000

L/hour * 6 for solar average flow rate

SOLAR PUMP SYSTEM INCLUDES:



4C 7-18 2.2kW Pump, motor and switch



Power, Low Water and SS Safety Cable Bore \$18p/m / Dam \$14p/m



Heavy Duty Cyclone Rated Pole Mount Frame



8x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Pouble acting float valve
For use with Pressure
Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions
1x Crate 440 x 60 x 65cm @ 280kg
1x Pallet 200 x 115 x 45cm @ 190kg



WATERBOY 4C 2.2kW 19-7 ACDC

4" Centrifugal Solar Pumping System

FEATURES

- Permanent magnet Brushless double shield motor with FOC function.
- Soft start operation function extends the life of the system.
- AC/DC wide voltage: 60-380VDC or 90-240VAC,50/60Hz.
- MPPT function for DC part, can achieve > 99% efficiency.
- PFC (Power Factor Correction) function for AC can increase power factor over 0.99.
- Protection for over/under-load, over-temperature, over-Current, over-Voltage, Phase lack.
- Locked rotor protection.

BENEFITS

- Lift up to 280m
- Flow rate up to 16,800 L/hour
- Designed for remote & harsh Australian conditions.
- Fast & simple installation.
- Maintenance-free
- High reliability & life expectancy

\$11,590+GST

Contact us for delivery rates

Bore part number: 4CBW19-7-3000B Dam Floating part number: 4CBW19-7-3000D Bore pump extra cabling: 6000B Dam pump extra cabling: 6000D





TDH	L/MIN	L/HOUR
10	280	16,800
20	230	13,800
30	200	12 000

L/hour * 6 for solar average flow rate





4C 19-7 2.2kW Pump, motor and switch



SOLAR PUMP SYSTEM INCLUDES:

Power, Low Water and SS Safety Cable Bore \$18p/m / Dam \$14p/m



Heavy Duty Cyclone Rated Pole Mount Frame



8x370w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST




Anode \$120+GST



Shipping Dimensions 1x Crate 440 x 60 x 65cm @ 280kg 1x Pallet 200 x 115 x 45cm @ 190kg

3000W CENTRIFUGAL PUMP SYSTEMS

High flow and high lift applications

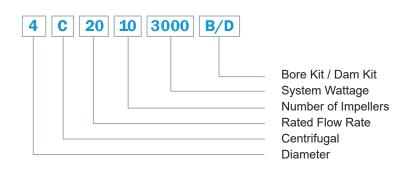

4C20103000B / 4C20103000D

4" Diameter

C - Centrifugal pump end

20 - Rated flow rate m3/hr

10 – Number of impellers

3000 – 3000w of solar power supplied with system

B - 6000B bore pump extra cabling (power, low water & ss safety cable) \$16/m+GST

D – 6000D dam pump system extra (Power and SS safety cable) \$12/m+GST

PERFORMANCE CHARTS

4C20103000			
TDH	L/MIN	L/DAY	
10	291	104,760	
20	250	90,000	
30	200	72,000	
40	165	59,400	
50	110	39,600	
60	65	23,400	

TDH - Total Dynamic Head is the calculation of vertical meters lift plus any friction loss in the delivery pipe. A bigger pipe size will help reduce friction and increase the pumps longevity.

L/DAY - Performance based on 6 peak sun hours of pumping. Summer months you can expect 20% more water per day and winter months 20% less.



3000W Centrifugal (C) solar pump systems include

- Drive Pack pump, motor, controller
- Heavy duty cyclone rated pole mount frame
- 3000W Mono crystalline solar panels
- Bore or Dam mounting accessory kit
- DC isolator

	4C446	63000	4C7 3	13000	4C121	L83000	4C201	.03000	5C 602	23000
TDH	L/MIN	L/DAY	L/MIN	L/DAY	L/MIN	L/DAY	L/MIN	L/DAY	L/MIN	L/DAY
10	66	23,760	121	43,560	200	72,000	291	104,760	580	210,000
20	65	23,400	116	41,760	183	65,880	250	90,000		
30	63	22,680	110	39,600	170	61,200	200	72,000		
40	61	21,960	105	37,800	158	56,880	165	59,400		
50	60	21,600	100	36,000	140	50,400	110	39,600		
60	59	21,240	93	33,480	125	45,000	65	23,400		
70	58	20,880	88	31,680	111	39,960				
80	56	20,160	85	30,600	100	36,000				
90	53	19,080	80	28,800	83	29,880				
100	50	18,000	75	27,000	65	23,400				
110	48	17,280	70	25,200	50	18,000				
120	45	16,200	63	22,680	33	11,880				
130	41	14,760	58	20,880	16	5,760				
140	38	13,680	53	19,080						
150	35	12,600	42	15,120						
160	33	11,880	38	13,680						
170	28	10,080	28	10,080						
180	26	9,360	24	8,640						
190	25	9,000	16	5,760						
200	23	8,280	8	2,880						
210	20	7,200								
220	16	5,760								
230	15	5,400								
240	11	3,960								
250	8	2,880								
RRP	\$12 ,	749	\$12	,749	\$12	2,749	\$12	,749	\$12	,749









- Dry run protection
- Bore cap or Dam float
- Easy DIY installation manual



WATERBOY 4C7313000 4" Centrifugal Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 200m
- Flow rate up to 43,560 L/day
- Simple installation
- Maintenance-free
- · High reliability & life expectancy



Contact u for deliver rates

Bore part number: 4C7313000B Dam Floating part number: 4C7313000D Bore pump extra cabling: 6000B Dam pump extra cabling: 6000D



4C7313000

TDH	L/MIN	L/DAY
50	100	36,000
60	93	33,480
70	88	31,680
80	85	30,600
90	80	28,800
100	75	27,000
110	70	25,200
120	63	22,680
130	58	20,880
140	53	19,080
150	42	15,120
160	38	13,680
170	28	10,080
180	24	8,640
190	16	5,760
200	8	2,880

SOLAR PUMP SYSTEM INCLUDES:




4CSS Pump, Motor, and Controller



Power, Low Water and SS Safety Cable Bore \$18p/m / Dam \$14p/m



Heavy Duty Cyclone Rated Pole Mount Frame



8x450w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions
1x Crate 440 x 60 x 65cm @ 280kg
1x Pallet 200 x 115 x 45cm @ 190kg



WATERBOY 4C12183000 4" Centrifugal **Solar Pumping System**


FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 130m
- Flow rate up to 72,000 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

Bore part number: 4C12183000B Dam Floating part number: 4C12183000D Bore pump extra cabling: 6000B Dam pump extra cabling: 6000D

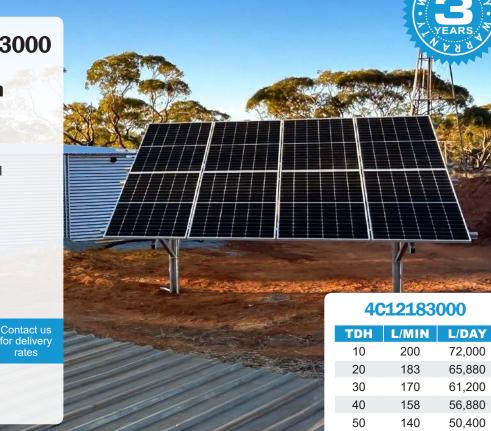

SOLAR PUMP SYSTEM INCLUDES:

rates



4CSS Pump, Motor, and Controller



Power, Low Water and SS Safety Cable Bore \$18p/m / Dam \$14p/m



Heavy Duty Cyclone Rated Pole Mount Frame



8x450w Mono Crystalline Solar Panels



Bore Cap or Dam Float



125

111

100

83

65

50

33

16

60 70

80

90

100

110

120

130

45,000

39,960

36,000

29,880

23,400

18,000

11,880

5,760

Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions 1x Crate 440 x 60 x 65cm @ 280kg 1x Pallet 200 x 115 x 45cm @ 190kg



WATERBOY 4C4463000 4" Centrifugal Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 250m
- Flow rate up to 23,760 L/day
- Simple installation
- Maintenance-free
- · High reliability & life expectancy

\$12,749+gst

for delivery rates

Bore part number: 4C4463000B Dam Floating part number: 4C4463000D Bore pump extra cabling: 6000B Dam pump extra cabling: 6000D



4C4463000

TDH	L/MIN	L/DAY
100	50	
		18,000
110	48	17,280
120	45	16,200
130	41	14,760
140	38	13,680
150	35	12,600
160	33	11,880
170	28	10,080
180	26	9,360
190	25	9,000
200	23	8,280
210	20	7,200
220	16	5,760
230	15	5,400
240	11	3,960
250	8	2,880

SOLAR PUMP SYSTEM INCLUDES:




4CSS Pump, Motor, and Controller



Power, Low Water and SS Safety Cable Bore \$18p/m / Dam \$14p/m



Heavy Duty Cyclone Rated Pole Mount Frame



8x450w Mono Crystalline Solar Panels



Bore Cap or Dam Float



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions
1x Crate 440 x 60 x 65cm @ 280kg
1x Pallet 200 x 115 x 45cm @ 190kg





SOLAR PUMP SYSTEM INCLUDES:



4CSS Pump, Motor, and Controller



Power, Low Water and SS Safety Cable Bore \$18p/m / Dam \$14p/m



Heavy Duty Cyclone Rated Pole Mount Frame



8x450w Mono Crystalline Solar Panels



60

65

Bore Cap or Dam Float



23,400

Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions
1x Crate 440 x 60 x 65cm @ 280kg
1x Pallet 200 x 115 x 45cm @ 190kg



WATERBOY 5C6023000 5" Centrifugal Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 10m
- Flow rate up to 93,600 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

\$12,749+gst

Contact us for delivery rates

Bore part number: 5C6023000B Dam Floating part number: 5C6023000D Bore pump extra cabling: 6000B Dam pump extra cabling: 6000D



SOLAR PUMP SYSTEM INCLUDES:




5CSS Pump, Motor, and Controller



Power, Low Water and SS Safety Cable Bore \$18p/m / Dam \$14p/m



Heavy Duty Cyclone Rated Pole Mount Frame



8x450w Mono Crystalline Solar Panels



3

5

10

16

830

750

580

330

Bore Cap or Dam Float



298,800

270,000

210,000

118,800

Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST



Shipping Dimensions 1x Crate 440 x 60 x 65cm @ 280kg 1x Pallet 200 x 115 x 45cm @ 190kg

BATTERY SYSTEMS







- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- All Stainless Steel
- High Efficiency

BENEFITS

- Lift up to 70m
- Flow rate up to 28,800 L/day
- Simple installation
- Maintenance-free
- High reliability & life expectancy

Contact us for delivery

Bore part number: 3HRH1500BP-B40 Dam Floating part number: 3HRH1500BP-D40



3HRH1500BP

TDH	L/MIN	L/DAY
10	20	28,800
20	19	27,360
30	17	24,480
40	15	21,600
50	12	17,280
60	10	14,400
70	8	11,520

SOLAR PUMP SYSTEM INCLUDES:



3HRSS-H controller

Heavy Duty pump and motor, Cyclone Rated Pole Mono Crystalline Mount Frame

4x370w Solar Panels



48V 80Ah Battery Pack in electrical enclosure



Bore Cap or Dam Float



40m of Power Cable low water probe & safety cabling



Low water protection (bore kit only)

ACCESSORIES



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Anode \$120+GST




Shipping Dimensions 1x Crate 175 x 55 x 65cm @ 150kg

DRIVE PACKS

Pump motor and controller only

Does not include solar panels or framing



These drive packs are used to make our complete systems, ie:

- 3HR200 utilises 3HRSS drivepack
- 3HRH400 uses the 3HRSS-H drivepack
- 4C782200 uses the 4CSS7-8 drive pack














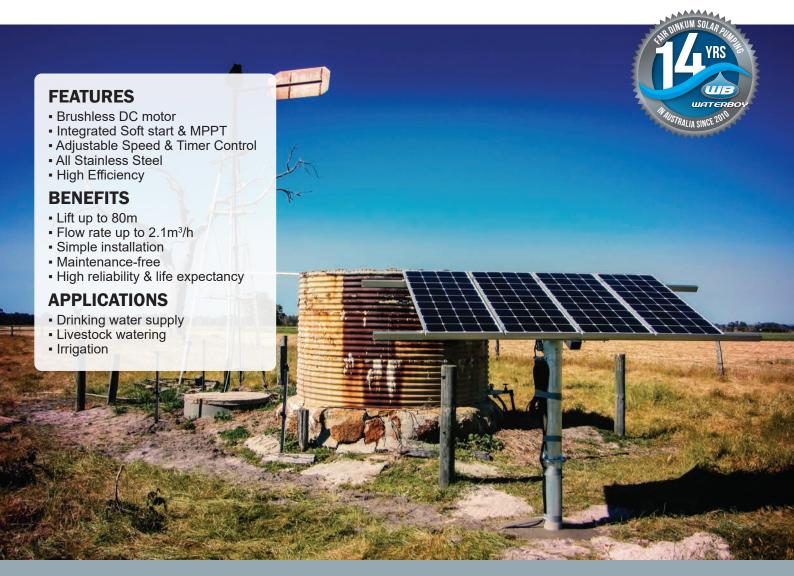

3" Helical Rotor Drive Packs







3HRSS

3" helical rotor submersible drive pack inc 210w motor, controller, spare helical rotor and 3m motor lead.

\$1,930+gst

3HRSS-35

3" helical rotor submersible drive pack inc 210w motor, controller, spare helical rotor and pump fitted with 35m power cable.

\$2,125+gst

3HRSS-H

3" helical rotor submersible drive pack inc 500w motor, controller, spare helical rotor and 3m motor lead.

\$2,210+GST

3HRSS-H-40

3" helical rotor submersible drive pack inc 500w motor, controller, spare helical rotor and pump fitted with 40m power cable.

\$2.425+gst


*** Does not include solar panels***

3HRSS-35 1x330w

TDH	L/MIN	L/DAY
5	16	5,760
10	16	5,760
15	15	5,400
20	15	5,400
25	14	5,040
30	13	4,680
40	11	3,960

3HRSS-H-40 2x330w

TDH	L/MIN	L/DAY
10	27	9,720
20	25	9,000
30	24	8,640
40	22	7,920
50	19	6,840
60	17	6,120
70	15	5,400
80	11	3,960

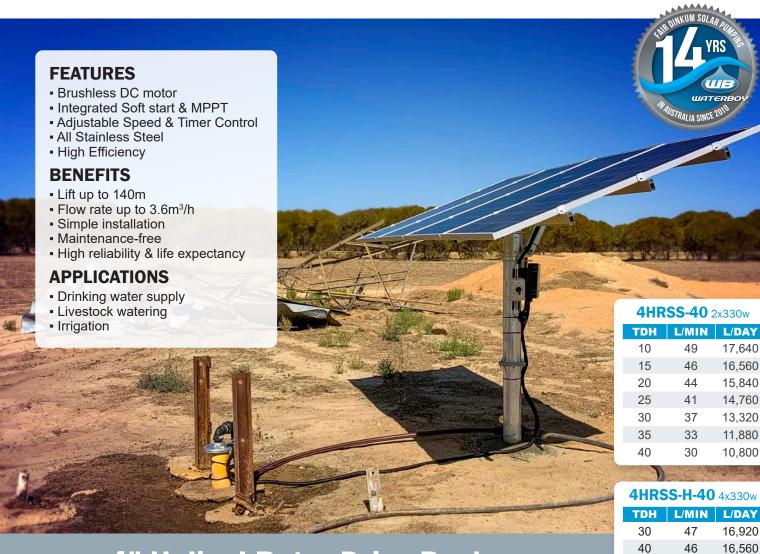

4" Helical Rotor Drive Packs







4HRSS

4" helical rotor submersible drive pack inc 500w motor, controller, spare helical rotor and 3m motor lead.

\$2.415+gst

4HRSS-40

4" helical rotor submersible drive pack inc 500w motor, controller, spare helical rotor and pump fitted with 40m power cable.

\$2,605+gst

4HRSS-H

4" helical rotor submersible drive pack inc 1000w motor, controller, spare helical rotor and 3m motor lead.

\$2,750+gst

4HRSS-H-40

4" helical rotor submersible drive pack inc 1000w motor, controller, spare helical rotor and pump fitted with 40m power cable.

\$3.100+gst

4HRSS-H-40 8x330w

44

42

36

33

28

25

15,840

15,120 14,040

12,960

11,880

10,080

9,000

7,200

50

60

70 80

90

100

110

120

TDH	L/MIN	L/DAY
40	60	21,600
50	55	19,800
60	50	18,000
70	45	16,200
80	40	14,400
90	38	13,680
100	34	12,240
110	30	10,800
120	27	9,720
130	23	8,280
140	19	6,840

^{***} Does not include solar panels***



Centrifugal (C) Drive Packs

28,800 20 75 27,000 30 70 25,200 40 63 22,680 50 57 20,520 60 50 18,000 70 40 14,400 80 11,520 32 9,360 90 26







4CSS 4-8

4" C submersible drive pack including 500w motor and controller, Max 100 Voc.

\$2.245+gst

4CSS 5-12

4" C submersible drive pack including 1000w motor and controller, Max 200 Voc.

\$2,735+gst

4CSS 7-8

4" C submersible drive pack including 1000w motor and controller, Max 200 Voc.

\$2,735+GST

*** Does not include solar panels***

4CSS 12-6

4" C submersible drive pack including 1000w motor and controller, Max 200 Voc.

\$2.840+gst

5CSS 28-2

5" C submersible drive pack including 1000w motor and controller, Max 200 Voc.

\$2,960+gst

4C	SS 4-8	4x105w
TDU	I /B/IIBI	I /DAY

TDH	L/MIN	L/DAY
5	42	15,120
10	41	14,760
15	34	12,240
20	28	10,080

4CSS 7-8 8x330w

TDH	L/MIN	L/DAY
10	130	46,800
20	120	43,200
30	100	36,000
40	90	32,400
50	80	28,800
60	70	25,200


4CSS 12-6 8x330w

TDH	L/MIN	L/DAY
10	200	72,000
20	160	57,600
30	120	43,200
40	90	32,400

5CSS 28-2 8x330w

TDH	L/MIN	L/DAY
10	260	93,600



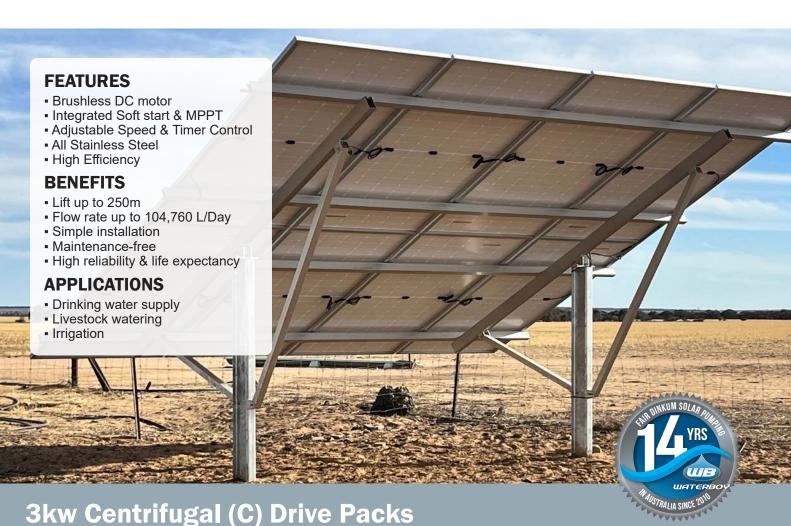







4CSS 12-18

4" C submersible drive pack including 3000w motor and controller, Max 430V DC

\$4.059+gst

4CSS 20-10

4" C submersible drive pack including 3000w motor and controller, Max 430V DC

\$4,059+gst

4CSS 4-46

4" C submersible drive pack including 3000w motor and controller, Max 430V DC

\$4,059+gst

4CSS 7-31

4" C submersible drive pack including 3000w motor and controller, Max 430V DC

\$4,059+gst

4CSS 12-18 8x430w

TDH	L/MIN	L/DAY
20	183	65,880
40	158	56,880
60	125	45,000
80	100	36,000
100	65	23,400
120	33	11,880

4CSS 7-31 8x430w

TDH	L/MIN	L/DAY
60	93	33,480
80	85	30,600
100	75	27,000
120	63	22,680
140	53	19,080
160	38	13,680
180	24	8,640
200	8	2,880

4CSS 4-46 8x430w

TDH	L/MIN	L/DAY
100	50	18,000
120	45	16,200
140	38	13,680
160	33	11,880
180	26	9,360
200	23	8,280
220	16	5,760
240	11	3,960

4CSS 20-10 8x430w

TDH	L/MIN	L/DAY
20	250	90,000
40	165	59,400
60	65	23,400

^{***} Does not include solar panels***



4" AC/DC Submersible Pump 4CBW2.2-7-18



FEATURES


- Permanent magnet Brushless double shield motor with FOC function.
- Soft start operation function extends the life of the system.
- AC/DC wide voltage: 60-380VDC or 90-240VAC,50/60Hz.
- MPPT function for DC part, can achieve efficiency more than 99%.
- PFC (Power Factor Correction) function for AC can increase power factor over 0.99.

- · No-load protection.
- · Reverse protection.
- Over load/under load protection.
- Over temperature protection.
- Over-current protection.
- Over-voltage protection.
- Phase lack protection.
- · Locked rotor protection.

BENEFITS

- Long life expectancy.
- Designed for use in remote & harsh Australian conditions.
- High efficiency .
- · Fast & simple installation.
- · Cost effective spare parts philosophy.



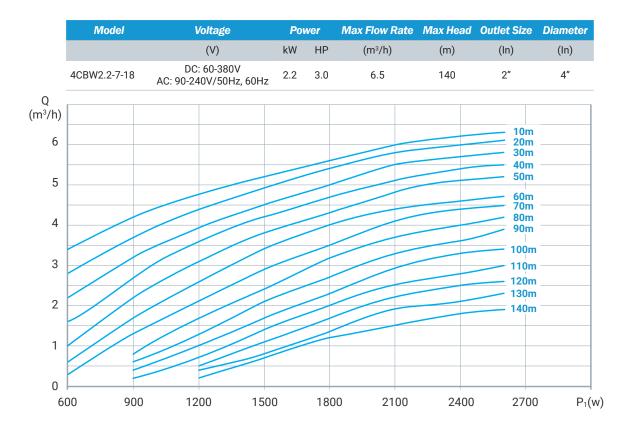



ELECTRICAL PARAMETERS

Power:	550w - 3000w
Current Range:	1.5-14A
Speed Range:	Max 3600 RPM
Insulation Class:	F
Protection Class:	IP 68
Maximum input voltage of the solar panel:	No more than 450Voc
Solar panel connection:	All in series

\$3,550+GST

Includes AC/DC Switch The pump has an external switch where AC power, DC power and pump can be connected to the switch and make automatic conversion. Water level sensor contacts to sense the water level and control the pump automatically.



4" AC/DC Submersible Pump 4CBW2.2-14-12



FEATURES

- Permanent magnet Brushless double shield motor with FOC function.
- Soft start operation function extends the life of the system.
- AC/DC wide voltage: 60-380VDC or 90-240VAC,50/60Hz.
- MPPT function for DC part, can achieve efficiency more than 99%.
- PFC (Power Factor Correction) function for AC can increase power factor over 0.99.


- · No-load protection.
- · Reverse protection.
- Over load/under load protection.
- Over temperature protection.
- Over-current protection.
- Over-voltage protection.
- Phase lack protection.
- · Locked rotor protection.

BENEFITS

- Long life expectancy.
- Designed for use in remote & harsh Australian conditions.
- · High efficiency.
- · Fast & simple installation.
- · Cost effective spare parts philosophy.



Model	Voltage	Por	ver	Max Flow Rate	Max Head	Outlet Size	Diameter
	(V)	kW	HP	(m³/h)	(m)	(In)	(In)
4CBW2.2-14-12	DC: 60-380V	2.2	3.0	14	165	2"	4"

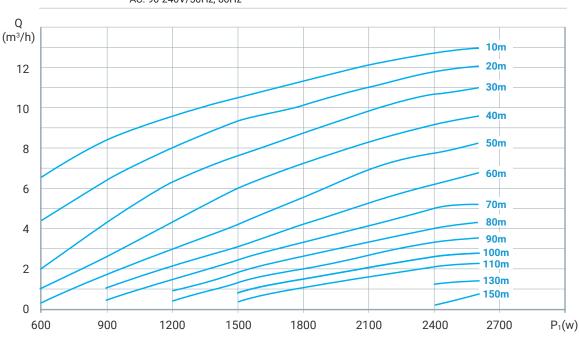



ELECTRICAL PARAMETERS

Power:	550w - 3000w
Current Range:	1.5-14A
Speed Range:	Max 3600 RPM
Insulation Class:	F
Protection Class:	IP 68
Maximum input voltage of the solar panel:	No more than 450Voc
Solar panel connection:	All in series

\$3,550+GST

Includes AC/DC Switch The pump has an external switch where AC power, DC power and pump can be connected to the switch and make automatic conversion. Water level sensor contacts to sense the water level and control the pump automatically.



4" AC/DC Submersible Pump 4CBW2.2-19-7



FEATURES


- Permanent magnet Brushless double shield motor with FOC function.
- Soft start operation function extends the life of the system.
- AC/DC wide voltage: 60-380VDC or 90-240VAC,50/60Hz.
- MPPT function for DC part, can achieve efficiency more than 99%.
- PFC (Power Factor Correction) function for AC can increase power factor over 0.99.

- · No-load protection.
- · Reverse protection.
- Over load/under load protection.
- Over temperature protection.
- Over-current protection.
- · Over-voltage protection.
- Phase lack protection.
- · Locked rotor protection.

BENEFITS

- · Long life expectancy.
- Designed for use in remote & harsh Australian conditions.
- · High efficiency.
- · Fast & simple installation.
- · Cost effective spare parts philosophy.



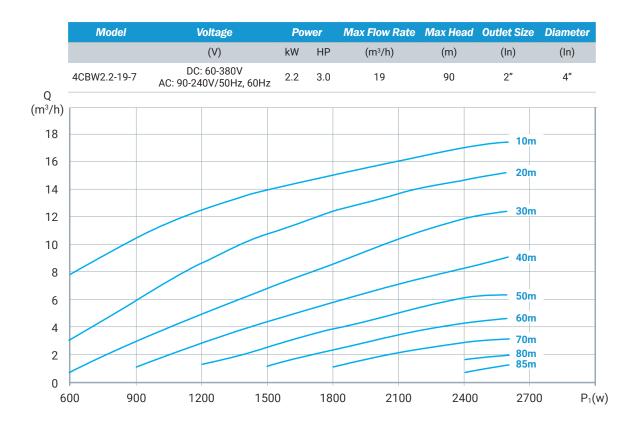



ELECTRICAL PARAMETERS

Power:	550w - 3000w
Current Range:	1.5-14A
Speed Range:	Max 3600 RPM
Insulation Class:	F
Protection Class:	IP 68
Maximum input voltage of the solar panel:	No more than 450Voc
Solar panel connection:	All in series

\$3,550+GST

Includes AC/DC Switch The pump has an external switch where AC power, DC power and pump can be connected to the switch and make automatic conversion. Water level sensor contacts to sense the water level and control the pump automatically.

SOLAR SURFACE PUMPING SYSTEMS & DRIVE PACKS





WATERBOY SSP3000 3kW solar pool pump system


BENEFITS

- Zero energy costs provide a very fast return on Investment.
- · Longer life expectancy than standard AC motors.
- · Quiet and efficient.
- · Proven in service record.
- Fast and simple installation, direct replacement for an existing pool pump.
- Smart modular design for simple and cost effective servicing & repair.
- Maintenance-free.
- High reliability & life expectancy.
- 2-year warranty

FARDINKUM SOLAR PUMPS







1x Panel Tin Roof Mount Kit



8x370w Mono Crystalline Solar Panels



20m DC Power Cable & Isolator

ТҮРЕ	VOLTAGE	POWER	MAX FLOW RATE	MAX WATER TEMP	MAX HEAD	INLET/OUTLET
SSP3000	110v DC operation	3000w	30m³/hr (220,000 L/day)	45°C	15m	3x3"

WATERBOY SSP3000 3kW solar pool pump system

Order Code: SSP3000

\$6,290+GST



FAR HAKUM SOLEDING

YEARS

WATERBOY SSC3-400 Surface Solar Pumping System

FEATURES

- Brushless DC motor
- Integrated Soft start & MPPT
- Adjustable Speed & Timer Control
- Remote Switching
- High Efficiency

BENEFITS

- Lift up to 25m
- Flow rate up to 2.2m³/h
- Simple installation
- Maintenance-free
- High reliability & life expectancy

SSC3-400

M	L/MIN	L/DAY		
5	38	13,680		
10	35	12,600		
15	27	9,720		
20	18	6,480		
25	10	3,600		
Daily flow based on 6 PSH				

\$5,038+GST Complete & ready to install

EACH WATERBOY SOLAR PUMP SYSTEM INCLUDES:

The SSC3-400 Solar Pump uses a centrifugal wet end coupled to a brushless DC motor. The motor is electronically communicated to by a fully adjustable MPPT pump controller housed in a weather proof enclosure for easy installation, access and peration.



SSC pump, motor, controller



Heavy Duty Cyclone Rated Pole Mount Frame



4x105w Mono Crystalline Solar Panels

ACCESSORIES

6101 - Tank switch 6045NO - Pressure switch 6112 - 1.5" Double acting float valve



Tank full switch inc 20m cable \$165+GST



Pressure Switch 12 bar inc gauge & fittings \$300+GST



Double acting float valve For use with Pressure Switch - \$300+GST



Shipping Dimensions
1x Crate 175 x 55 x 65cm @ 150kg



Solar Surface Pump Drive Packs





WATERBOY SSP1500

1.5kW Solar Pool Pump Pump, Motor & Controller

\$2,257+GST

BENEFITS

- Zero energy costs provide a very fast return on Investment.
- Longer life expectancy than standard AC motors.
- · Quiet and efficient.
- Proven in service record.
- Fast and simple installation, direct replacement for an existing pool pump.
- Smart modular design for simple and cost effective servicing & repair.
- Maintenance-free.
- · High reliability & life expectancy.
- 2-year warranty

FEATURES

Voltage: 110V DC operation **Power:** 1500W 3 phase DC motor

Max Voltage: 200VDC

Max Flow Rate: 30m3/h / 180,000 L/day

Max Water Temp: 45°C Solar operation: 2000-2500W

Max Head: 15m Inlet/Outlet: 3" x 3"

PERFORMANCE

M	L/MIN	L/DAY
2	500	180,000
5	440	158,400
10	300	108,000
15	180	64,800



WATERBOY SSC3

500W Surface Pump Pump, Motor & Controller

\$1,914+gst

BENEFITS

- Zero energy costs provide a very fast return on Investment.
- Quiet and efficient.
- Smart modular design for simple and cost effective servicing & repair.
- Maintenance-free.
- High reliability & life expectancy.
- 2-year warranty

FEATURES

Voltage: 48V DC operation **Power:** 500W 3 phase DC motor

Max Voltage: 100VDC

Max Flow Rate: 3m3/h / 18,000 L/day

Max Water Temp: 45°C Solar operation: 500 - 800W

Max Lift: up to 40m Max Head: 15m Inlet/Outlet: 1" x 1"

PERFORMANCE (2X330W)

M	L/MIN	L/DAY
5	45	16,200
10	40	14,400
15	33	11,880
20	25	9,000
30	15	5,400
40	10	3,600


SOLAR PANELS SOLAR ARRAY FRAMES & SPARE PARTS






Monocrystalline Solar Panels


WB105M



WB370M



WB450M



\$300+gst

- 15.75% Maximum Module Efficiency
- 3 Years Limited Product Warranty
- 20 Years Performance Warranty

\$550+GST

- 19.80% Maximum Module Efficiency
- 12 Years Limited Product Warranty
- 25 Years Performance Warranty

\$600+gst

- 20.70% Maximum Module Efficiency
- 12 Years Limited Product Warranty
- 25 Years Performance Warranty

MECHANICAL

Solar Cells	PERC Mono crystalline 166x83mm
Dimensions	1557x415x35mm
Front Glass	3.2mm AR coating tempered glass, low iron
Weight	23Kg
Output Cable	4.0mm ² , cable length 300mm
Connector	MC4 Compatible
Junction Box	IP 68, 3 diodes
Frame	Anodized aluminium alloy

MECHANICAL

Solar Cells	PERC Mono crystalline 166x83mm
Dimensions	1755x1038x35mm
Front Glass	3.2mm AR coating tempered glass, low iron
Weight	23Kg
Output Cable	4.0mm ² , cable length 300mm
Connector	MC4 Compatible
Junction Box	IP 68, 3 diodes
Frame	Anodized aluminium alloy

MECHANICAL

Solar Cells	PERC Mono crystalline 166x83mm
Dimensions	2094x1038x35mm
Front Glass	3.2mm AR coating tempered glass, low iron
Weight	23Kg
Output Cable	4.0mm ² , cable length 300mm
Connector	MC4 Compatible
Junction Box	IP 68, 3 diodes
Frame	Anodized aluminium alloy

PERFORMANCE

Max Power	Pmax	105W
Max Power Tolerance	ΔPmax	0~+3%
Max Power Voltage	Vmpp	17.5V
Max Power Current	Impp	6.0A
Open-Circuit Voltage	Voc	22.0V
Short-Circuit Current	Isc	6.45A
Module Efficiency	Eff.	15.75%

PERFORMANCE

Max Power	Pmax	370W
Max Power Tolerance	ΔPmax	0~+3%
Max Power Voltage	Vmpp	34.01V
Max Power Current	Impp	10.88A
Open-Circuit Voltage	Voc	40.81V
Short-Circuit Current	Isc	11.33A
Module Efficiency	Eff.	19.80%

PERFORMANCE

Max Power	Pmax	450W
Max Power Tolerance	ΔPmax	0~+3%
Max Power Voltage	Vmpp	41.50V
Max Power Current	Impp	10.85A
Open-Circuit Voltage	Voc	49.30V
Short-Circuit Current	Isc	11.6A
Module Efficiency	Eff.	20.70%



Solar Array Frames



OVERVIEW

The WATERBOY fixed solar arrays have been designed to work with the WATERBOY range of solar pump systems and solar panels.

The heavy duty cyclone rated, hot galvanised, steel mounting posts have upper and lower sections which bolt together. This increases portability and ease of installation.

The angle of the solar array can be adjusted in 5 steps between 10° and 50°.

FEATURES

- Cyclone rated
- Aluminium Components are 6005 T5
- Steel components are Q235 and are hot dipped gavanised
- Bolts are \$\$304
- Adjustable angle of array in 5 steps between 10° and 50°
- Clamps compatible with most 35mm solar modules

WARRANTY

Three years manufacturer's warranty against defects in material and workmanship, from date of installation.



WATERBOY Mini

2.3m wide (4x105w or 2x340w panels)

The Mini fixed array will hold up to 4 x 105w or 2 x 340w solar panels with a total of 2.39m wide.

Mounting clamps are suitable for panels that are 35mm thick.

\$1,155+gst

Part number: WB-Mini

WATERBOY Midi

4.4m wide (4x340w panels)

The Midi fixed array will hold up to 4 x 340w solar panels with a total of 4.4m wide.

Mounting clamps are suitable for panels that are 35mm thick.

\$1,755+GST

Part number: WB-Midi

WATERBOY Maxi

4m high x 4.4m wide (8x340w or 8x430w panels)

The Maxi fixed array will hold up to 8 panels with 2 strings of 4 @ 4.4m wide and 4m high.

Mounting clamps are suitable for panels that are 35mm thick.

\$2,783+gst

Part number: WB-MaxiXL



WATERBOY Tin Roof Mount

4.4m wide (4x340w panels)

The Tin roof mount kit will hold up to 4 x 340w solar panels with a total of 4.4m wide. Mounting clamps are suitable for panels that are 35mm thick.

\$300+gst

Part number: RMKIT





\$1,008+gst

24 - 48V nominal, Max 100V DC

pump controller suitable for use with

3HRSS, 3HRSS-H, 4HRSS &

4CSS4-8 pumps.

\$1.210+GST

96 - 110V nominal, Max 200V DC

pump controller suitable for use

with 4HRSS-H and 1000w

centrifugal pumps.

\$1,760+gst

300V nominal, Max 450V DC

pump controller suitable for use

with 3000w centrifugal pumps.



NPCB500

24 – 48V nominal, Max 100V DC New style cast ally cover from 2023 onwards

\$892+gst



NPCB1000

96 – 110V nominal, Max 200V DC New style cast ally cover from 2023 onwards

\$1,105+gst



PCB500

24 – 48V nominal, Max 100V DC Plastic Cover Controller Pre 2023

\$892+gst



PCB1000

96 – 110V nominal, Max 200V DC Plastic Cover Controller Pre 2023

\$1.105+gst



ACDC SWITCH SW0023

90 – 240V AC 60 – 380V DC MAX 450V DC / 240V AC

\$855+gst



Pumps & Motors



HELICAL ROTOR PUMPS & MOTORS



2HRSS 370W 36V DC

Motor Only

\$915 +gst

Part No. 237048



3HRSS 210W 36V DC

Motor Only

\$960 + GST

Part No. 321048



3HRSS-H 500W 48V DC

Motor Only

\$1,008 +gst

Part No. 350048



4HRSS 500W 48V DC

Motor Only

\$1.029 +GST

Part No. 450048



4HRSS-H 1000W 110V

Motor Only

\$**1.135** +gst

Part No. 41000110



2HRSS 370W 2" HR 36V DC

Submersible Pump & Motor

\$**1,290** + GST

Part No. 20370



3HRSS 210W 3" HR 36V DC

Submersible Pump & Motor

\$1,370 + GST

Part No. 30210



3HRSS-H 500W 3" HR 48V DC

Submersible Pump & Motor

\$**1,548** +gst

Part No. 30500



4HRSS 500W 4" HR 48V DC

Submersible Pump & Motor

\$1,548 + GST

Part No. 40500



4HRSS-H 1000W 4" HR 110V

Submersible Pump & Motor

\$1,760 +gst

Part No. 41000



3HRSS 210W

Helical Rotor Assembly

\$250 + GST

Part No. 30001



3HRSS-H 500W

Helical Rotor Assembly

\$250 + GST

Part No. 30002



4HRSS 500W

Helical Rotor Assembly

\$295 + GST

Part No. 40001



4HRSS-H 1000W

Helical Rotor Assembly

\$330 + GST

Part No. 40002



Pumps & Motors



CENTRIFUGAL PUMPS & MOTORS



500W 4" C 48V DC

Motor Only

\$1.050 +gst

Part No. 450048C



1000W 4" C 110V DC

Motor Only

\$1.265 +вsт

Part No. 41000110C



3000W 4" C 330-360V DC

Motor Only

\$1,925 +gst

Part No. 43000330C



4CBW 2.2kW Motor 2200W 4" C AC/DC

Motor Only

\$2,100 + GST

Part No. 4CBW2.2MO



4CSS4-8 500W 4" C 48V DC

Submersible Pump & Motor

\$1.750 + GST

Part No. 40548



4CSS5-12 1000W 4" C 110V DC

Submersible Pump & Motor

\$**1.955** + GST

Part No. 41512



4CSS7-8 1000W 4" C 110V DC

Submersible Pump & Motor

\$1,955 + GST

Part No. 4178



4CSS12-6 1000W 4" C 110V DC

Submersible Pump & Motor

\$1,955 + GST

Part No. 41126



5CSS28-2 1000W 5" C 110V DC

Submersible Pump & Motor

\$1,955 + GST

Part No. 51282



Submersible Pump & Motor

\$2,960 +gst

Part No. 4CBW718

4CBW2.2 14-12 2200W 4" C AC/DC

Submersible Pump & Motor

\$2,960 +gst

Part No. 4CBW1412



4CBW2.2 19-7 2200W 4" C AC/DC

Submersible Pump & Motor

\$2,960 +gst

Part No. 4CBW197



1500W Pool Pump and Motor

Pump & Motor Only

\$1,350 +gst

Part No. 1500PM



500W Surface C Pump and Motor

Pump & Motor Only

\$1,140 +gst

Part No. SSC3PM



Accessories







\$70 +gst

Part No. 6055



Tank Full Switch

Including 20m Cable

\$165 + GST

Part No. 6101



Pressure Switch

N/O N/C 12 Bar Gauge & Fittings

\$300 +gst

Part No. 6045NO



Pressure Switch

N/O N/C 12 Bar

\$231 + GST

Part No. XMXA12L2135



Dam Float

Suit 3" WATERBOY Pump

\$195 + GST

Part No. 6103



Dam Float

Suit 4" WATERBOY Pump

\$380 +gst

Part No. 6104



Sacrificial Anode

3" HR

\$120 + GST

Part No. 6013



Sacrificial Anode 4" HR

\$120 +GST

Part No. 6014



Sacrificial Anode 11/4"

4" Centrifugal

\$120 + GST

Part No. 6015



Sacrificial Anode 1½"

4" Centrifugal

\$120 + GST

Part No. 6016



1000V 32A DC Isolator

MC4 Connectors

\$160 +gst

Part No. ISOMC4



MC4 M&F Lead

2m

\$40 +gst

Part No. MC4/2M-S



MC4 Branch Connector

Positive

\$35 + GST

Part No. CA-MC4-PP



MC4 Branch Connector

Negative

\$35 + GST

Part No. CA-MC4-NS



Double Acting Float Valve

11/4"



\$300 +gst

Part No. 6114



Double Acting Float Valve

11/2

\$300 + GST

Part No. 6112



Low Level Sensor



\$100 + GST

Part No. 1658



Low Level Sensor

Fitted with 40m Cable

\$160 + GST

Part No. 165840



Accessories




CABLING (PER METER)

Add extra cabling to any package






















Part No. 6500





AC - DC POWER PACKS











1300 554 307
sales@waterboypumps.com.au
accounts@waterboypumps.com.au
www.waterboypumps.com.au